



Oil cleaning: A simple solution for an invisible problem

A Simple, environmentally friendly solution for increased uptime and process availability.
Investing in oil cleaning gives your company a better economy.

EF2135DT


Offline oil cleaner

Removes all types of contamination:

- Soft and hard particles down to $\geq 0,1 \mu\text{m}$
- Bacteria
- Water (free and emulsified)
- Oxidation products (sludge and resin).

Benefits:

- Cost effective maintenance
- No oil changes = Environmentally friendly
- Change filters instead of changing oil
- Increased machine lifetime
- Less downtime
- No oxidation in oil

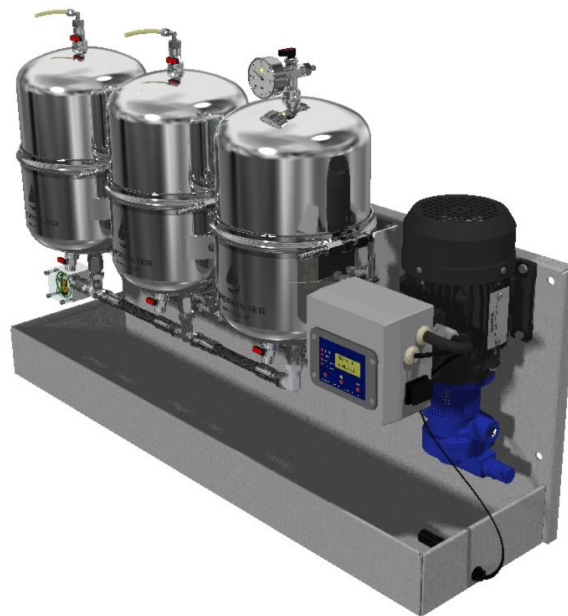


Filter insert EF500HY

Dirt capacity: ISO 12103-1 FTD: 1755 g $\geq 0,1$ micron

Water absorption, restricted and unrestricted: $\geq 3000\text{ml}$

Material insert: Cellulose, Polypropylene Homopolymer




TECHNICAL SPECIFICATION

Europafilter	EF2135DT							
Dry weight:	46,3 kg							
Operating weight:	71,2 kg							
Depth:	299 mm							
Width:	947 mm							
Height:	626 mm (Service height filter replacement + 250 mm)							
Dirt capacity: (particles/water)	Particles ISO 12103-1 FTD: 1755 g \geq 0,1 micron Water absorption, restricted and unrestricted: \geq 3000 ml (Depending on oiltype)							
Oil temp:	Max. 80 °C (On higher temperatures contact Europafilter)							
Particle removal:	\geq 0,1 micron							
Working pressure:	0.8–5 bar							
Pressure:	Max. 6 bar, safety valve opens at 6 bar							
Power consumption:	0.12 kW							
Power supply:	Standard 1x230 V. Optional 3x220 V / 3x400 V+N. Others on request							
Hose connection IN:	\varnothing 3/4" BSP							
Hose connection OUT:	\varnothing 3/8" BSP							
Installation (see drawing):	Connect as an offline unit. «IN» = hose to tank and «UT» = hose to tank							
Flow, min.–max.:	6–240 l/h. Varies depending on oil viscosity and pressure							
Approx flow at 3 bar:	32 cSt	46 cSt	68 cSt	100 cSt	150 cSt	220 cSt	320 cSt	460 cSt
	6 l/min	4,5 l/min	3 l/min	2,4 l/min	1,8 l/min	1,2l/min	0,6 l/min	0,3 l/min
Oil volume *, max. rec.:	18000 l	13500 l	9000 l	7800 l	6600 l	6000 l	2700 l	1350 l

* For other oilvolumes: Contact your Europafilter dealer.

TECHNICAL DRAWING Offline installation

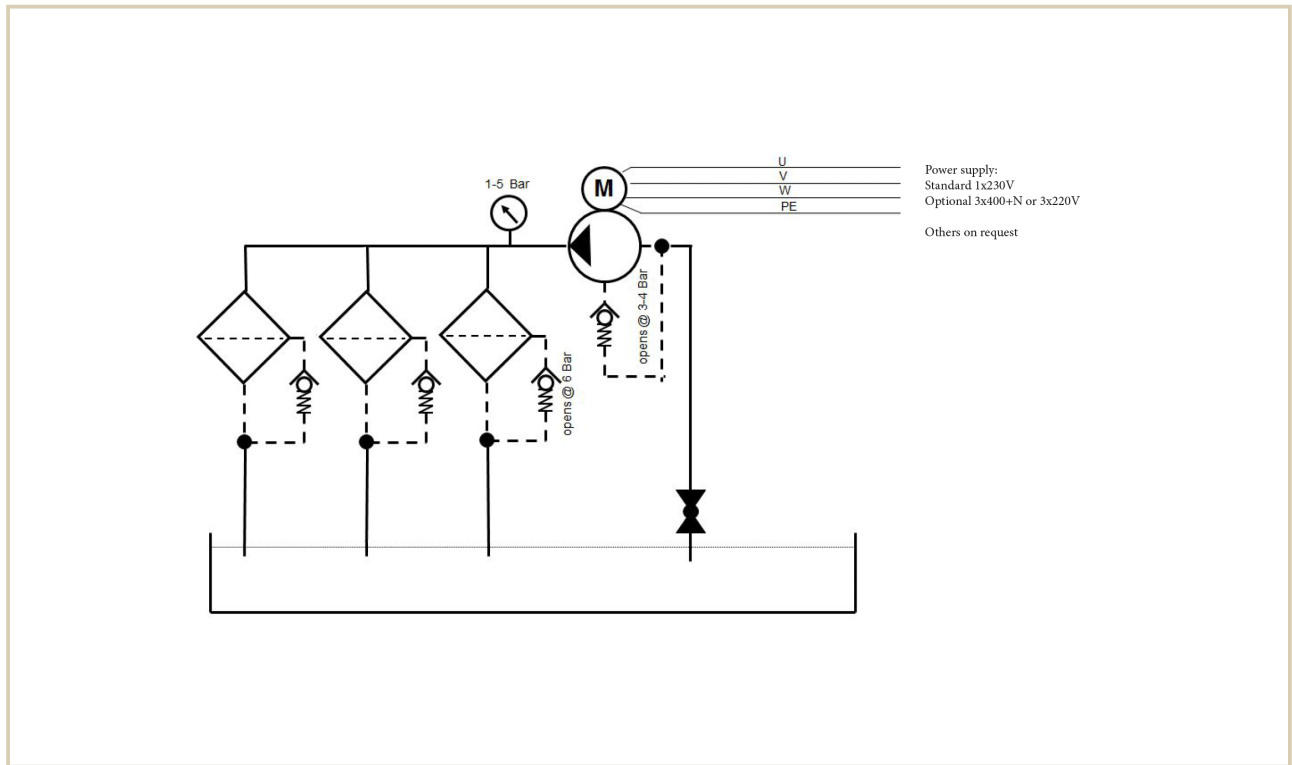

TECHNICAL SPECIFICATION

