



## Oil cleaning: A simple solution for an invisible problem

A Simple, environmentally friendly solution for increased uptime and process availability. Investing in oil cleaning gives your company a better economy.


### EF2165Dsbs Offline oil cleaner

#### Removes all types of contamination:

- Soft and hard particles down to  $\geq 0,1 \mu\text{m}$
- Bacteria
- Water (free and emulsified)
- Oxidation products (sludge and resin).

#### Benefits:

- Cost effective maintenance
- No oil changes = Environmentally friendly
- Change filters instead of changing oil
- Increased machine lifetime
- Less downtime
- No oxidation in oil

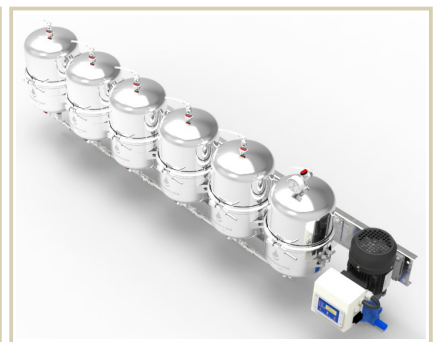


### Filter insert EF500HY

Dirt capacity: ISO 12103-1 FTD: 1755 g  $\geq 0,1$  micron

Water absorption, restricted and unrestricted:  $\geq 3000\text{ml}$

Material insert: Cellulose, Polypropylene Homopolymer




## TECHNICAL SPECIFICATION

Europafilter	EF2165Dsbs							
Dry weight:	51 kg							
Operating weight:	84,2 kg							
Depth:	300 mm							
Width:	1894 mm							
Height:	531 mm (Service height filter replacement + 250 mm)							
Dirt capacity: (particles/water)	Particles ISO 12103-1 FTD: 1755 g $\geq$ 0,1 micron Water absorption, restricted and unrestricted: $\geq$ 3000 ml (Depending on oiltype)							
Oil temp:	Max. 80 °C (On higher temperatures contact Europafilter)							
Particle removal:	$\geq$ 0,1 micron							
Working pressure:	0.8–5 bar							
Pressure:	Max. 6 bar, safety valve opens at 6 bar							
Power consumption:	0.12 kW							
Power supply:	Standard 1x230 V. Optional 3x220 V / 3x400 V+N. Others on request							
Hose connection IN:	$\varnothing$ 3/4" BSP							
Hose connection OUT:	$\varnothing$ 3/8" BSP							
Installation (see drawing):	Connect as an offline unit. «IN» = hose to tank and «UT» = hose to tank							
Flow, min.–max.:	6–240 l/h. Varies depending on oil viscosity and pressure							
Approx flow at 3 bar:	32 cSt	46 cSt	68 cSt	100 cSt	150 cSt	220 cSt	320 cSt	460 cSt
	12 l/min	9 l/min	6 l/min	4,8 l/min	3,6 l/min	2,4l/min	1,2 l/min	0,6 l/min
Oil volume *, max. rec.:	36000 l	27000 l	18000 l	15600 l	13200 l	12000 l	5400 l	2700 l

\* For other oilvolumes: Contact your Europafilter dealer.

## TECHNICAL DRAWING Offline installation



TECHNICAL SPECIFICATION

